





Keiper PTFE-Glasgewebe/Teflon

7-er Serie, geschlossene Oberflächen


Type	Gewicht g/m ²	Dicke in mm		Zugfestigkeit N/cm		Fertigungsbreite mm
		mm	mil	Kette	Schuß	
7058	255	0.12	5	260	260	1500
7228 smooth	1085	0.57	22	800	680	2600
7256	850	0.62	24	850	950	3150
7257	1140	0.66	25	850	950	3150
7278	1085	0.65	27	600		2600
7279	1200	0.69	27	600	600	2600
7290	1015	0.74	29	1150	840	2500

7-er AS Serie, geschlossene Oberfläche mit Antistatik-Ausrüstung

Type	Gewicht g/m ²	Dicke in mm		Zugfestigkeit N/cm		Fertigungsbreite mm
		mm	mil	Kette	Schuß	
7058 AS	255	0.12	5			1500
7148 AS	610	0.34	14	670	530	2600
7168 AS	750	0.43	16	700	500	4000
7257 AS	1140	0.66	27	1150	840	3150
7259 AS	1015	0.65	27	950	1170	2450
7273 ASC	1103	0.55	21	900	900	2400
7278 AS	1085	0.68	27	700		2500
7290 AS	1015	0.74	29	850	820	2550

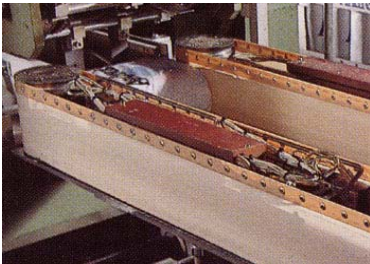

Transportband mit Führungsnoppen aus Metall

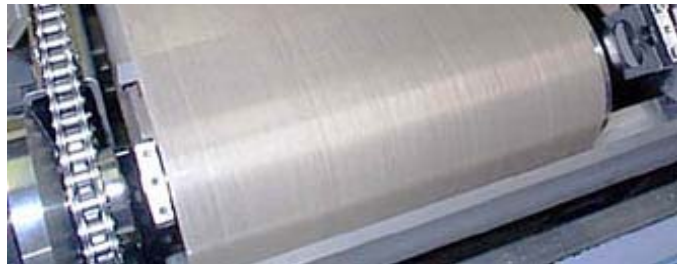

Transportband mit überlappter Verbindung