



DATA SHEET FLATBELTS



Art. No.	30081
Product name	CROMA 15D
Product group	CROMA
Category	High efficiency belt

Specifications

Traction layer

Material	polyamide
----------	-----------

Back side


Material	chrome leather
Colour	grey
Thickness	1,2
Surface	grinded

Running side

Material	chrome leather
Colour	grey
Thickness	1,2
Surface	grinded

Technical Data

Total thickness (mm)	2,9
Weight (kg/qm)	2,9
Temperature Range (°C)	- 20 / + 80
Coef. Friction > Steel	k.A.
Tensile Strength	5
1% tension N/mm	
Tensile force (N/mm)	220
Min. pulley Ø (mm)	40
Max. production width (mm)	500

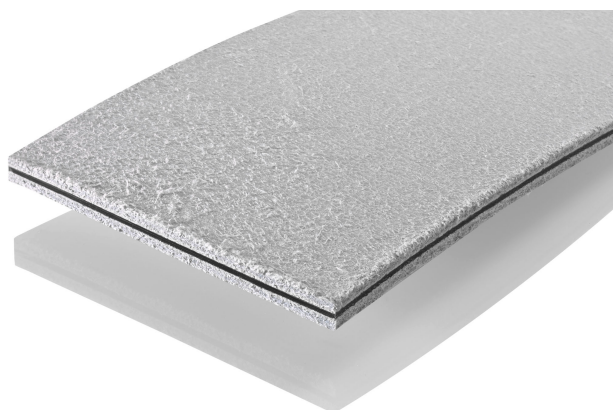

Properties

Antistatic	not specified
Flame resistant	no
Oil & fat resistant	yes

Applications

hydropower plants, sawmills, wood industry, machine drives, agriculture

Products

Circular saws, generators, saw and stone gates, mill drives, water turbines and milling machines

Additional information

high efficiency, high belt speed, shock resistance, reliable adhesion and power transmission even in dirty environments

Last data modification 01.05.2018