



## DATA SHEET FLATBELTS



<b>Art. No.</b>	<b>30083</b>
<b>Product name</b>	<b>CROMA 25D</b>
Product group	CROMA
Category	High efficiency belt

### Specifications

#### Traction layer

Material	polyamide
----------	-----------

#### Back side


Material	chrome leather
Colour	grey
Thickness	1,8
Surface	grinded

#### Running side

Material	chrome leather
Colour	grey
Thickness	1,8
Surface	grinded

#### Technical Data

Total thickness (mm)	4,7
Weight (kg/qm)	4,7
Temperature Range (°C)	- 20 / + 80
Coef. Friction > Steel	k.A.
Tensile Strength	12
1% tension N/mm	
Tensile force (N/mm)	500
Min. pulley Ø (mm)	90
Max. production width (mm)	500

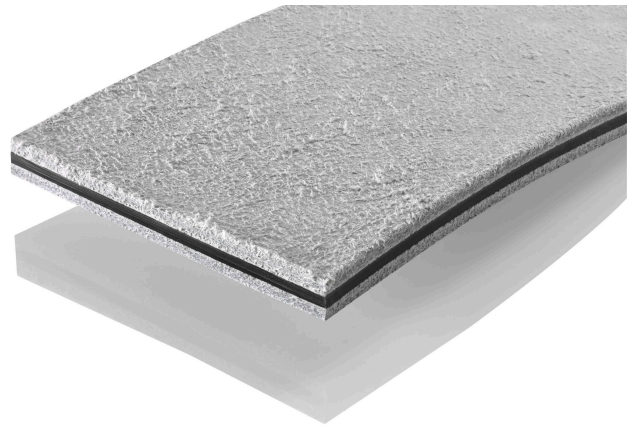

#### Properties

Antistatic	not specified
Flame resistant	no
Oil & fat resistant	yes

#### Applications

hydropower plants, sawmills, wood industry, machine drives, agriculture

#### Products

Circular saws, generators, saw and stone gates, mill drives, water turbines and milling machines

#### Additional information

high efficiency, high belt speed, shock resistance, reliable adhesion and power transmission even in dirty environments

Last data modification 01.05.2018