




DATA SHEET FLATBELTS

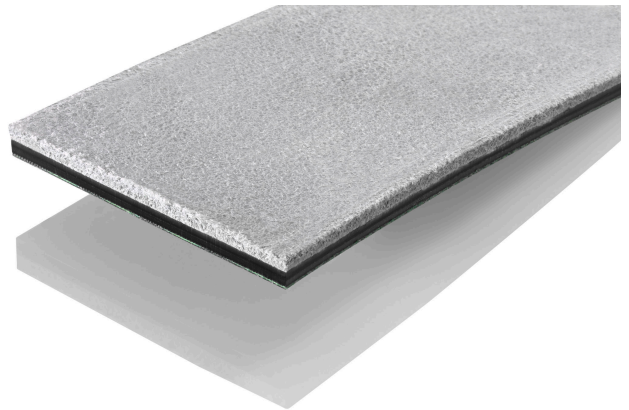

| | |
|---------------------|----------------------|
| Art. No. | 30078 |
| Product name | CROMA 35 |
| Product group | CROMA |
| Category | High efficiency belt |

Specifications

Traction layer

| | |
|----------|-----------|
| Material | polyamide |
|----------|-----------|

Back side

| | |
|-----------|-------------|
| Material | fabric (PA) |
| Colour | green |
| Thickness | 0 |
| Surface | raw |

Running side

| | |
|-----------|----------------|
| Material | chrome leather |
| Colour | grey |
| Thickness | 2,5 |
| Surface | grinded |

Technical Data

| | |
|-------------------------------------|-------------|
| Total thickness (mm) | 4,2 |
| Weight (kg/qm) | 4,6 |
| Temperature Range (°C) | - 20 / + 80 |
| Coef. Friction > Steel | k.A. |
| Tensile Strength 1% tension N/mm | 13,5 |
| Tensile force (N/mm) | |
| Min. pulley Ø (mm) | 200 |
| Max. production width (mm) | 500 |

Properties

| | |
|---------------------|---------------|
| Antistatic | not specified |
| Flame resistant | no |
| Oil & fat resistant | yes |

Applications

hydropower plants, sawmills, wood industry, machine drives, agriculture

Products

Circular saws, generators, saw and stone gates, mill drives, water turbines and milling machines

Additional information

high efficiency, high belt speed, shock resistance, reliable adhesion and power transmission even in dirty environments

Last data modification 01.01.2014