




DATA SHEET FLATBELTS

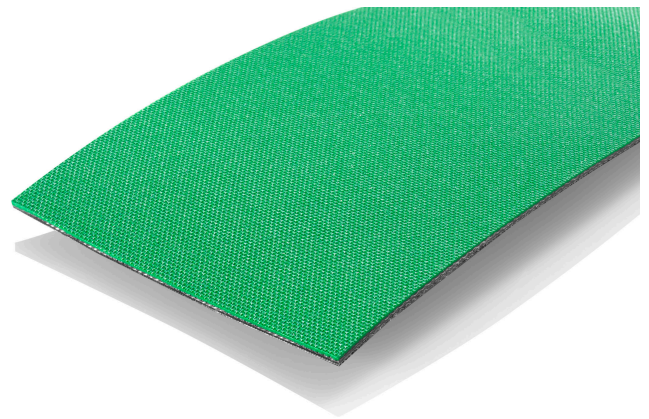

Art. No.	20007
Product name	FLEXA 12G
Product group	FLEXA
Category	High efficiency belt

Specifications

Traction layer

Material	polyamide
----------	-----------

Back side

Material	fabric (PA)
Colour	black
Thickness	0
Surface	raw

Running side

Material	elastomer
Colour	green
Thickness	0,6
Surface	structured

Technical Data

Total thickness (mm)	1,2
Weight (kg/qm)	1,1
Temperature Range (°C)	- 20 / + 80
Coef. Friction > Steel	k.A.
Tensile Strength	2
1% tension N/mm	
Tensile force (N/mm)	85
Min. pulley Ø (mm)	15
Max. production width (mm)	500

Properties

Antistatic	no
Flame resistant	no
Oil & fat resistant	yes

Applications

machine drives, wood-, paper- and printing industry, packaging machines

Products

Additional information

high efficiency, high belt speed, shock resistance, reliable adhesion and power transmission even

Last data modification 01.05.2018