




DATA SHEET FLATBELTS

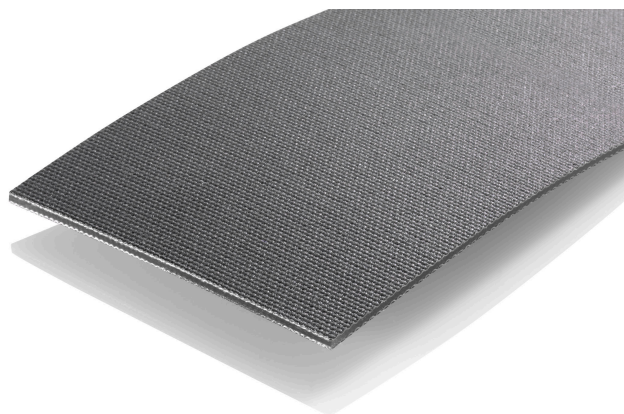

Art. No.	310695
Product name	FLEXA 12 HC
Product group	FLEXA
Category	Machine tape

Specifications

Traction layer

Material	polyamide
----------	-----------

Back side

Material	fabric (PA)
Colour	black
Thickness	0
Surface	fabric impregnated

Running side

Material	fabric (PA)
Colour	black
Thickness	0
Surface	fabric impregnated

Technical Data

Total thickness (mm)	1,2
Weight (kg/qm)	1,4
Temperature Range (°C)	- 20 / + 80
Coef. Friction > Steel	k.A.
Tensile Strength	5
1% tension N/mm	
Tensile force (N/mm)	220
Min. pulley Ø (mm)	30
Max. production width (mm)	500

Properties

Antistatic	yes
Flame resistant	no
Oil & fat resistant	yes

Applications

Feeding and transport in the paper and printing industry, packaging industry, transport, drive of transport elements, flat belt drives, conveyor belts, printing machines, letter distribution systems, sorting machines, office machines

Products

Additional information

long service life, constant coefficient of friction, thermal and chemical resistance

Last data modification 01.05.2018