




## DATA SHEET FLATBELTS

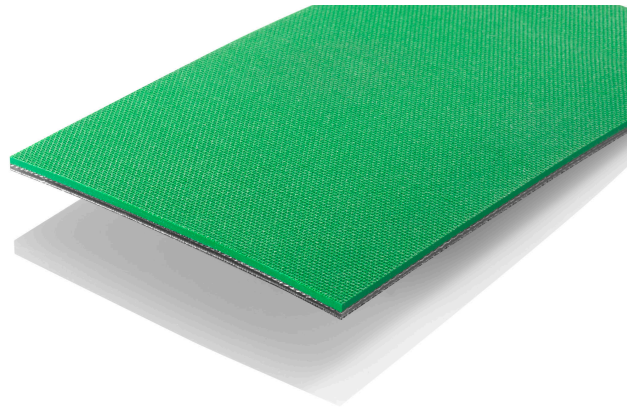

<b>Art. No.</b>	<b>30027</b>
<b>Product name</b>	<b>FLEXA GF20AS</b>
Product group	FLEXA
Category	Machine belt/Carrier belt

### Specifications

#### Traction layer

Material	polyamide
----------	-----------

#### Back side

Material	fabric (PA)
Colour	black
Thickness	0
Surface	raw

#### Running side

Material	elastomer
Colour	green
Thickness	1,35
Surface	structured

#### Technical Data

Total thickness (mm)	2
Weight (kg/qm)	2,2
Temperature Range (°C)	- 20 / + 100
Coef. Friction > Steel	k.A.
Tensile Strength 1% tension N/mm	4
Tensile force (N/mm)	130
Min. pulley Ø (mm)	30
Max. production width (mm)	500

#### Properties

Antistatic	yes
Flame resistant	no
Oil & fat resistant	yes

#### Applications

Feeding and transport in the paper and printing industry, packaging industry, transport, drive of transport elements, flat belt drives, conveyor belts, printing machines, letter distribution systems, sorting machines, office machines

#### Products

#### Additional information

long service life, constant coefficient of friction, thermal and chemical resistance

Last data modification 01.05.2018