




DATA SHEET FLATBELTS

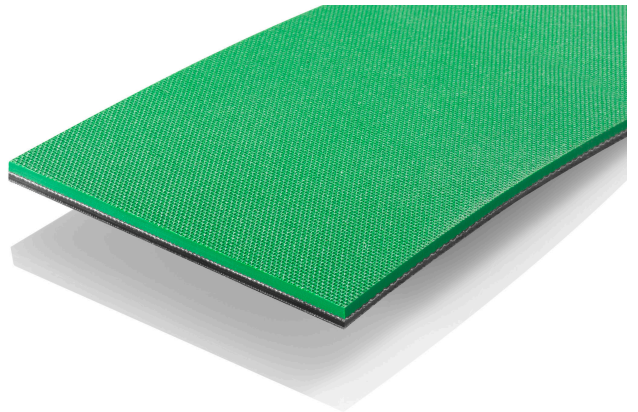

| | |
|---------------------|---------------------------|
| Art. No. | 30028 |
| Product name | FLEXA GF30AS |
| Product group | FLEXA |
| Category | Machine belt/Carrier belt |

Specifications

Traction layer

| | |
|----------|-----------|
| Material | polyamide |
|----------|-----------|

Back side

| | |
|-----------|-------------|
| Material | fabric (PA) |
| Colour | black |
| Thickness | 0 |
| Surface | raw |

Running side

| | |
|-----------|------------|
| Material | elastomer |
| Colour | green |
| Thickness | 1,75 |
| Surface | structured |

Technical Data

| | |
|-------------------------------------|--------------|
| Total thickness (mm) | 2,6 |
| Weight (kg/qm) | 3 |
| Temperature Range (°C) | - 20 / + 100 |
| Coef. Friction > Steel | k.A. |
| Tensile Strength 1% tension N/mm | 5 |
| Tensile force (N/mm) | 240 |
| Min. pulley Ø (mm) | 40 |
| Max. production width (mm) | 500 |

Properties

| | |
|---------------------|-----|
| Antistatic | yes |
| Flame resistant | no |
| Oil & fat resistant | yes |

Applications

Feeding and transport in the paper and printing industry, packaging industry, transport, drive of transport elements, flat belt drives, conveyor belts, printing machines, letter distribution systems, sorting machines, office machines

Products

Additional information

long service life, constant coefficient of friction, thermal and chemical resistance

Last data modification 01.05.2018