




## DATA SHEET FLATBELTS

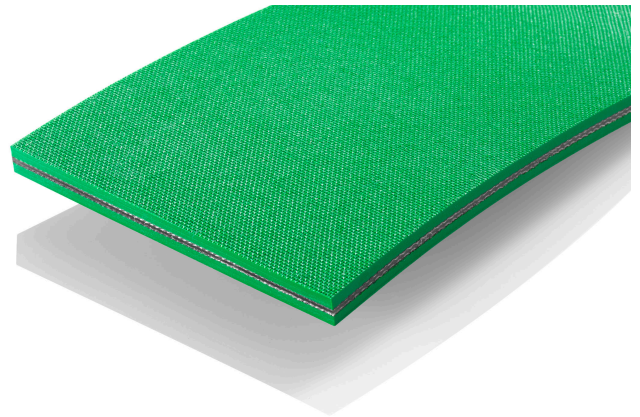

<b>Art. No.</b>	<b>30032</b>
<b>Product name</b>	<b>FLEXA GG40</b>
Product group	FLEXA
Category	Box folding belt

### Specifications

#### Traction layer

Material	polyamide
----------	-----------

#### Back side

Material	elastomer
Colour	green
Thickness	1,85
Surface	structured

#### Running side

Material	elastomer
Colour	green
Thickness	1,85
Surface	structured

#### Technical Data

Total thickness (mm)	4
Weight (kg/qm)	4,4
Temperature Range (°C)	- 20 / + 80
Coef. Friction > Steel	k.A.
Tensile Strength	4
1% tension N/mm	
Tensile force (N/mm)	140
Min. pulley Ø (mm)	30
Max. production width (mm)	500

#### Properties

Antistatic	yes
Flame resistant	no
Oil & fat resistant	yes

#### Applications

Paper and cardboard industry

#### Products

Gluing machines, folding machines, sorting machines, winding machines, filling and closing machines

#### Additional information

excellent flexural properties, high abrasion resistance, excellent dimensional stability, constant and secure adhesion and precise folding, leave no marks on the transported products, high running stability

Last data modification 01.05.2018