




DATA SHEET FLATBELTS

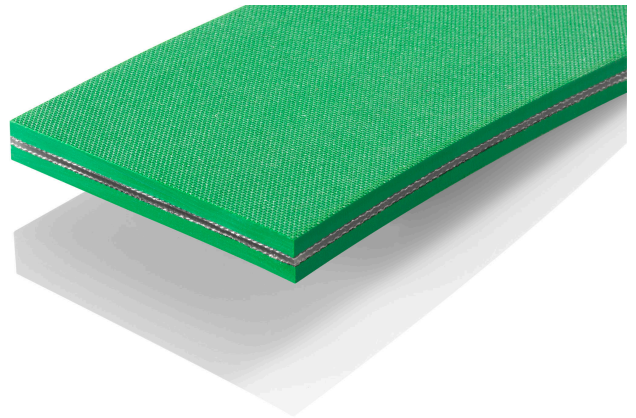

| | |
|---------------------|-------------------|
| Art. No. | 30034 |
| Product name | FLEXA GG60 |
| Product group | FLEXA |
| Category | Box folding belt |

Specifications

Traction layer

| | |
|----------|-----------|
| Material | polyamide |
|----------|-----------|

Back side

| | |
|-----------|------------|
| Material | elastomer |
| Colour | green |
| Thickness | 2,6 |
| Surface | structured |

Running side

| | |
|-----------|------------|
| Material | elastomer |
| Colour | green |
| Thickness | 2,6 |
| Surface | structured |

Technical Data

| | |
|----------------------------|-------------|
| Total thickness (mm) | 6 |
| Weight (kg/qm) | 6,7 |
| Temperature Range (°C) | - 20 / + 80 |
| Coef. Friction > Steel | k.A. |
| Tensile Strength | 7 |
| 1% tension N/mm | |
| Tensile force (N/mm) | 320 |
| Min. pulley Ø (mm) | 50 |
| Max. production width (mm) | 500 |

Properties

| | |
|---------------------|-----|
| Antistatic | yes |
| Flame resistant | no |
| Oil & fat resistant | yes |

Applications

Paper and cardboard industry

Products

Gluing machines, folding machines, sorting machines, winding machines, filling and closing machines

Additional information

excellent flexural properties, high abrasion resistance, excellent dimensional stability, constant and secure adhesion and precise folding, leave no marks on the transported products, high running stability

Last data modification 01.05.2018