




DATA SHEET FLATBELTS

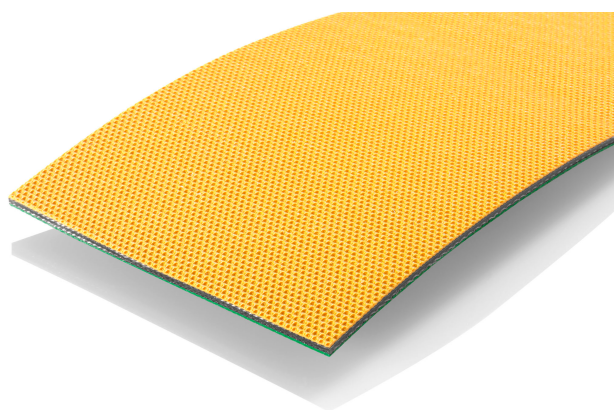

Art. No.	30016
Product name	FLEXA L18
Product group	FLEXA
Category	High efficiency belt

Specifications

Traction layer

Material	polyamide
----------	-----------

Back side

Material	elastomer
Colour	orange
Thickness	0,6
Surface	structured

Running side

Material	elastomer
Colour	green
Thickness	0,6
Surface	structured

Technical Data

Total thickness (mm)	1,6
Weight (kg/qm)	1,8
Temperature Range (°C)	- 20 / + 80
Coef. Friction > Steel	k.A.
Tensile Strength	4
1% tension N/mm	
Tensile force (N/mm)	140
Min. pulley Ø (mm)	25
Max. production width (mm)	500

Properties

Antistatic	no
Flame resistant	no
Oil & fat resistant	yes

Applications

Flat belt drives, transport belts, printing machines, letter distribution machines, sorting machines, paper stackers

Products

Additional information

high efficiency, high belt speed, shock resistance, reliable adhesion and power transmission even, two-sided force transmission

Last data modification 01.05.2018