




DATA SHEET FLATBELTS

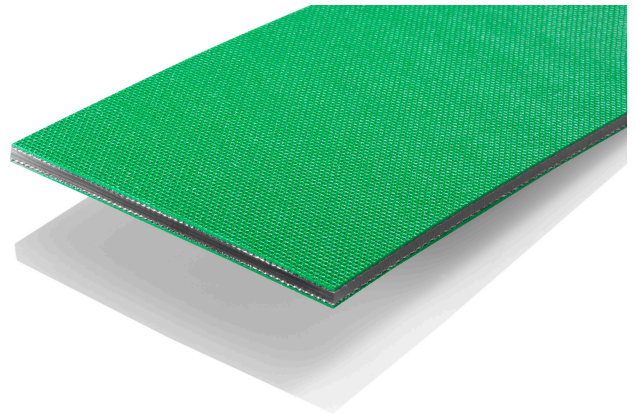

Art. No.	30052
Product name	FLEXA T26
Product group	FLEXA
Category	Tangential belt

Specifications

Traction layer

Material	polyamide
----------	-----------

Back side

Material	elastomer
Colour	green
Thickness	0,75
Surface	structured

Running side

Material	elastomer
Colour	green
Thickness	0,75
Surface	structured

Technical Data

Total thickness (mm)	2,6
Weight (kg/qm)	2,8
Temperature Range (°C)	- 20 / + 100
Coef. Friction > Steel	k.A.
Tensile Strength	10
1% tension N/mm	
Tensile force (N/mm)	500
Min. pulley Ø (mm)	70
Max. production width (mm)	500

Properties

Antistatic	no
Flame resistant	no
Oil & fat resistant	yes

Applications

textile industry

Products

Spindle drives, circular knitting machines, twisting machines, ring and rewinder machines, paper roll drives, rotor drives

Additional information

high abrasion resistance, antistatic properties, high running stability, very low belt slip, ideal surface textures, two-sided force transmission, shock resistance, low noise level

Last data modification 01.05.2018