




## DATA SHEET FLATBELTS

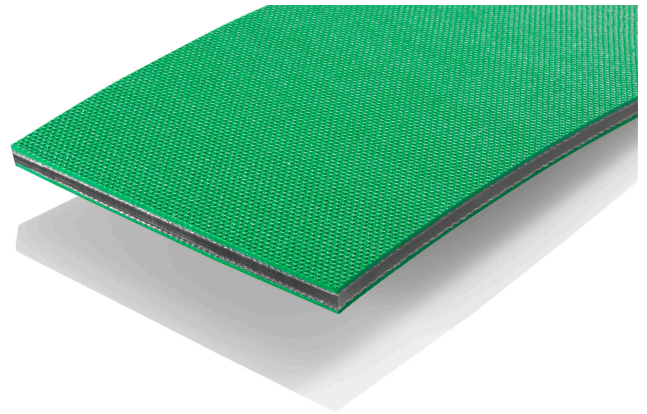

<b>Art. No.</b>	<b>30055</b>
<b>Product name</b>	<b>FLEXA T32/15</b>
Product group	FLEXA
Category	Tangential belt

### Specifications

#### Traction layer

Material	polyamide
----------	-----------

#### Back side

Material	elastomer
Colour	green
Thickness	0,75
Surface	structured

#### Running side

Material	elastomer
Colour	green
Thickness	0,75
Surface	structured

#### Technical Data

Total thickness (mm)	3,2
Weight (kg/qm)	3,5
Temperature Range (°C)	- 20 / + 100
Coef. Friction > Steel	k.A.
Tensile Strength	15
1% tension N/mm	
Tensile force (N/mm)	650
Min. pulley Ø (mm)	120
Max. production width (mm)	500

#### Properties

Antistatic	no
Flame resistant	no
Oil & fat resistant	yes

#### Applications

textile industry

#### Products

Spindle drives, circular knitting machines, twisting machines, ring and rewinder machines, paper roll drives, rotor drives

#### Additional information

high abrasion resistance, antistatic properties, high running stability, very low belt slip, ideal surface textures, two-sided force transmission, shock resistance, low noise level

Last data modification 01.05.2018