



DATA SHEET CONVEYOR BELT



Article-No.	40334
Product name	Supergrip
Category	UNITRANS
Product group	PVC Conveyor Belt

SPECIFICATIONS

Tractin layer

Material	polyester fabric
Number of layers	2
Properties	lateral stabil

Top side

Coating material	PVC
Color	petrol
Thickness (mm)	4,0
Surface	Supergrip
Hardness (Shore A)	55

Bottom side

Coating material	fabric
Color	nature
Thickness (mm)	0,0
Surface	fabric

TECHNICAL DATA


Total thickness (mm)	5,1
Weight (kg/qm)	4,0
Temperature longtime (°C)	- 5 / + 80
Temperature shorttime (°C)	- 15 / + 100
Friction coefficient (steel)	0,16 - 0,23

Tensile strength (1% tension) (N/mm)	9
Breaking strength (N/mm)	120

Minimum pulley Ø (mm)	45
with bending Ø (mm)	70

Max. production width (mm)	2000-2930
----------------------------	-----------

Last modification on	20.04.2012
----------------------	------------

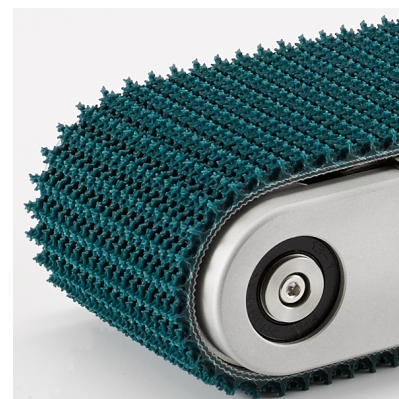

PROPERTIES

Food contact suitability

EU 10/2011	Nein/no
FDA	Nein/no
USDA	Nein/no

Antistatic	✓
Metal detector suitable	keine Angabe
Oil & fat resistant	Nein/no
Flame resistant	Nein/no
Smooth running fabric	Nein/no

Suitable for

Slider bed	✓
Rollers	✓
Trough	Nein/no
Curved	Nein/no

Divers

rough carrying side structure, high carrying capacity

Applications

Process belt, downwards and rising transport belt, in-house transport, packaging, logistics, material handling, inclined conveyors

Products

Cardboard boxes, packages, luggage, boxes, sheet metal, metals, plastic