




DATA SHEET CONVEYOR BELT

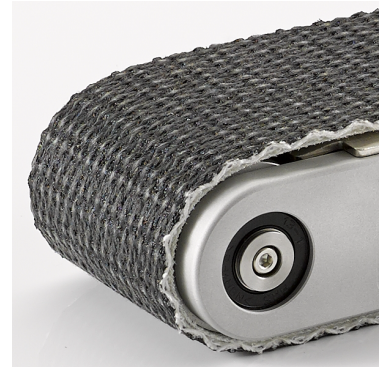

Article-No.	40347
Product name	2E/VSW00 ES
Category	UNITRANS
Product group	PVC Conveyor Belt

SPECIFICATIONS

Tractin layer

Material	polyester fabric
Number of layers	2
Properties	lateral stabil

Top side

Coating material	fabric
Color	black
Thickness (mm)	0,1
Surface	fabric impregnated
Hardness (Shore A)	

Bottom side

Coating material	fabric
Color	nature
Thickness (mm)	0,0
Surface	fabric

TECHNICAL DATA

Total thickness (mm)	4,0
Weight (kg/qm)	4,2
Temperature longtime (°C)	- 5 / + 80
Temperature shorttime (°C)	- 15 / + 100
Friction coefficient (steel)	0,17 - 0,23

Tensile strength (1% tension) (N/mm)	22
Breaking strength (N/mm)	400

Minimum pulley Ø (mm)	60
with bending Ø (mm)	100

Max. production width (mm)	2000
----------------------------	------

Last modification on	28.03.2019
----------------------	------------

PROPERTIES

Food contact suitability

EU 10/2011	Nein/no
FDA	Nein/no
USDA	Nein/no

Antistatic	✓
Metal detector suitable	keine Angabe
Oil & fat resistant	✓
Flame resistant	Nein/no
Smooth running fabric	keine Angabe

Suitable for

Slider bed	✓
Rollers	✓
Trough	Nein/no
Curved	Nein/no

Divers

high abrasion and cut resistant, extremely resistant fabric

Applications

Metalworking, stamping belt, recycling, waste management, automotive industry, wood industry

Products

Sheet metal, metals, steel, stamped parts, plastic, sharp-edged products, waste, wood, pallets